25 August, 2015

ASX Release

Kidman Resources Limited
ABN 88 143 526 096

Corporate Details:
ASX Code: KDR

Issued capital:
132.3M ordinary shares

Substantial Shareholders:
Capri 13.2m (9.98%)
Holdex Nominees 11.3m (8.5%)

Directors:
Non-Executive Chairman:
Garrick Higgins
Managing Director:
Martin Donohue
Non-Executive Director:
Brad Evans

Chief Operating Officer (COO):
Tony Davis

Chief Financial Officer (CFO):
Melanie Leydin

Company Secretary:
Justin Mouchacca

Contact Details:

Kidman Resources Limited
Suite 3, Level 4
12 - 20 Flinders Lane
Melbourne
Victoria 3000
Australia

Tel: +61 (0)3 9671 3801
Fax: +61 (0)3 9671 3523

Email:
info@kidmanresources.com.au

Website:
www.kidmanresources.com.au

Lodged Electronically

Initial 99,000oz Resource for Burbanks gold mine in WA

Imminent upgrade expected on back of drilling underway; first production set for next month

Key Points:

- **Initial Mineral Resource of 99,000oz at 5.6gpt gold reported in accordance with the JORC Code (2012), established at Burbanks gold mine near Coolgardie.**
- **Current 3000m RC drilling program well advanced outside initial Mineral Resource with assay results imminent.**
- **Additional 7500m of diamond drilling set to start in the first week of September 2015 targeting outside initial Mineral Resource (refer Figure 1).**
- **Exploration Target of a potential additional 625-650,000 tonnes at 4-6gpt gold estimated 80,000 - 120,000 oz.**
- **Production activities continue in Birthday Gift underground on multiple levels on Tailor and Jesson lodes.**
- **Christmas open pit optimisation complete with mining now scheduled to commence in September.**
- **Milling of gold ore scheduled to commence early in September as planned at the time of the Burbank's acquisition.**

Kidman Resources Limited (ASX: KDR) is pleased to announce an initial Mineral Resource of 99,000 ounces at 5.6gpt gold reported in accordance with the JORC Code (2012) at its Burbanks gold mine near Coolgardie in WA. Kidman acquired the Burbank's mine in May this year and immediately set about establishing an initial Mineral Resource as part of its process of bringing Burbank's into production in the September quarter. The company has already commenced an extensive RC (3600m) and diamond (7500m) drilling program which aims to upgrade this resource further. Milling of gold ore from underground is now scheduled to commence early in September as planned at the time of the acquisition.

For personal use only

About 80 per cent of this Mineral Resource is contained in the Birthday Gift underground mine at Burbanks with the rest in the associated Christmas open pit. While the open pit will be an additional source of ore from early September through to years end, all future drilling and longer term production will be underground.

The Mineral Resource, which was estimated by independent consultant Mining Plus Pty Ltd, was based on the 5,612m Reverse Circulation drilling programme completed by Kidman since it acquired Burbanks in May this year as well as the project's historic drilling data base.

Kidman is already well advanced with another RC drilling program 75% complete and will continue to assess the Mineral Resource once the results are available. In addition to this, an extensive 7,500m underground diamond drilling program will start early in September from the 1280 level with a view to further increasing the Mineral Resource.

The initial Resource estimate follows Kidman's agreement earlier this month to lease and operate the Burbanks processing plant owned by Ramelius Resources Limited (ASX: RMS). This agreement has resulted in Kidman succeeding in re-creating Burbanks as a stand-alone operation.

Mineral Resource Estimate for the Burbanks Deposit - as of the end of July 2015							
Area	Cut-Off	Indicated			Inferred		
		Tonnes	Grade	Ounces	Tonnes	Grade	Ounces
Open Pit Resource	1.0	30,000	4.5	4,500	10,000	4.7	1,500
Underground Resource	2.5	185,000	5.8	34,500	325,000	5.6	58,500
Total Resource	**1.0 / 2.5**	**215,000**	**5.6**	**39,000**	**335,000**	**5.5**	**60,000**
The preceding statements of Mineral Resources conforms to the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code) 2012 Edition. All tonnages reported are dry metric tonnes. Minor discrepancies may occur due to rounding to appropriate significant figures.							

Table 1: Mineral Resource Inventory for Burbanks Underground and Open Pit Resource

Tonnage-Grade Curve			
Cut-Off	Tonnes	Grade	Ounces
0.5	1,316,940	3.20	135,490
1.0	1,162,977	3.52	131,615
1.5	911,671	4.15	121,640
2.0	690,736	4.91	109,040
2.5	533,841	5.70	97,831
3.0	424,024	6.47	88,204
3.5	336,997	7.31	79,202
4.0	261,865	8.33	70,132
4.5	217,105	9.17	64,007
5.0	182,689	10.01	58,795

Table 2: Grade Tonnage Curve indicating High grade potential for the deposit

Kidman is currently stockpiling ore from the Birthday Gift underground mine and will start processing it next month. This will be supplemented by ore from the Christmas open pit.

Kidman has also estimated an Exploration Target of 80,000-120,000oz (625-650,000 tonnes at 4-6gpt gold). The potential quantity and grade of the Exploration Target is conceptual in nature and at this stage there is insufficient data to include this target within the defined Mineral Resource. It is uncertain if further exploration will result in the determination of an addition to the Mineral Resource of Burbanks.

The Exploration Target has integrated the newly interpreted structural model that involved a mapping campaign within the Birthday Gift Underground Operations as well as a review of the production figures and exploration activities historically completed in the Burbanks Mining centre. The newly established mineralisation model has shown that multiple lodes at the Burbanks Mine are yet to be fully delineated and with a methodical drill programme further ounce additions may be established.

In the underground mine, development has been completed and services are well established on the 1280L. This is the primary location for the initial phase of the 7500m underground drilling program due to commence in the first week of September 2015.

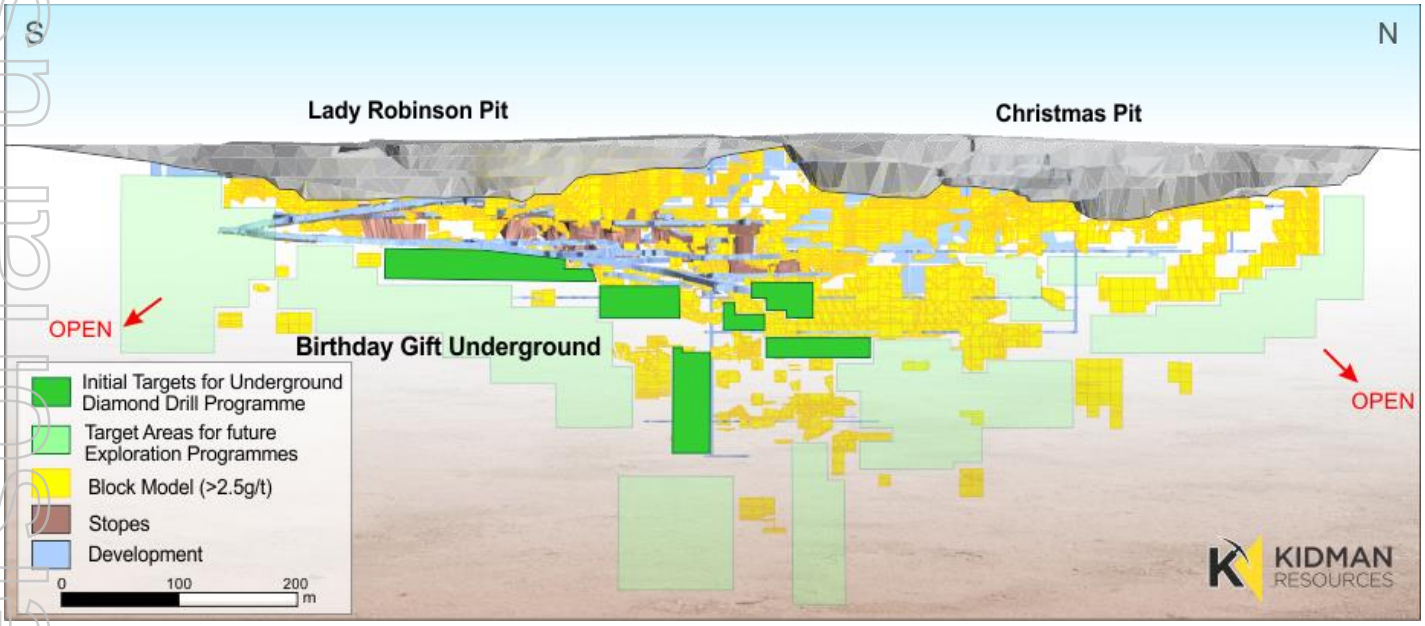


Figure 1: 99,000Oz Resource and UG Diamond Drilling targets

For personal use only

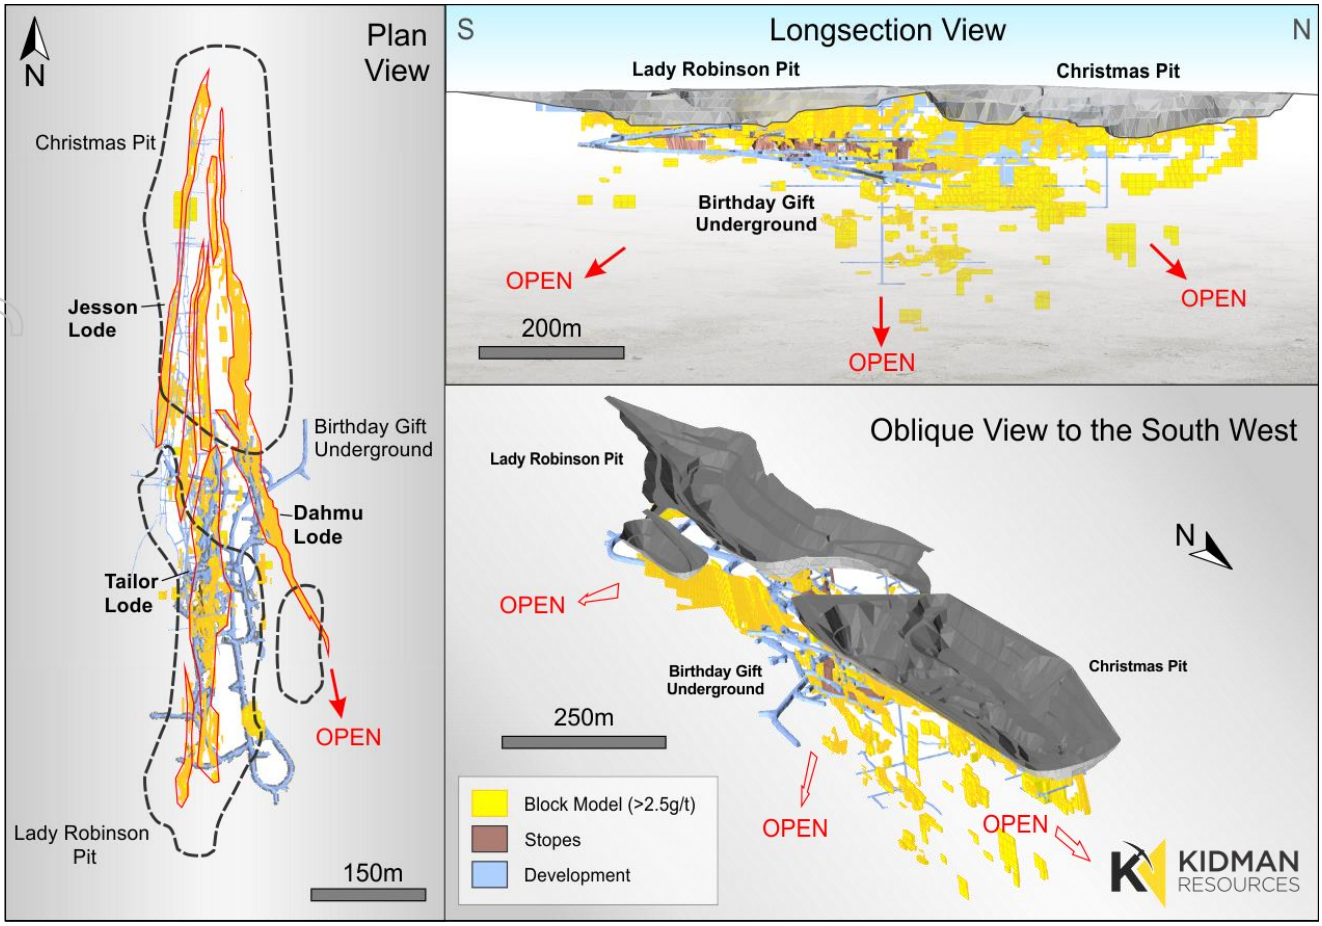


Figure 2: 99,000Oz Resource defined at the Burbanks Mine over multiple lodes that remain open along strike and at depth

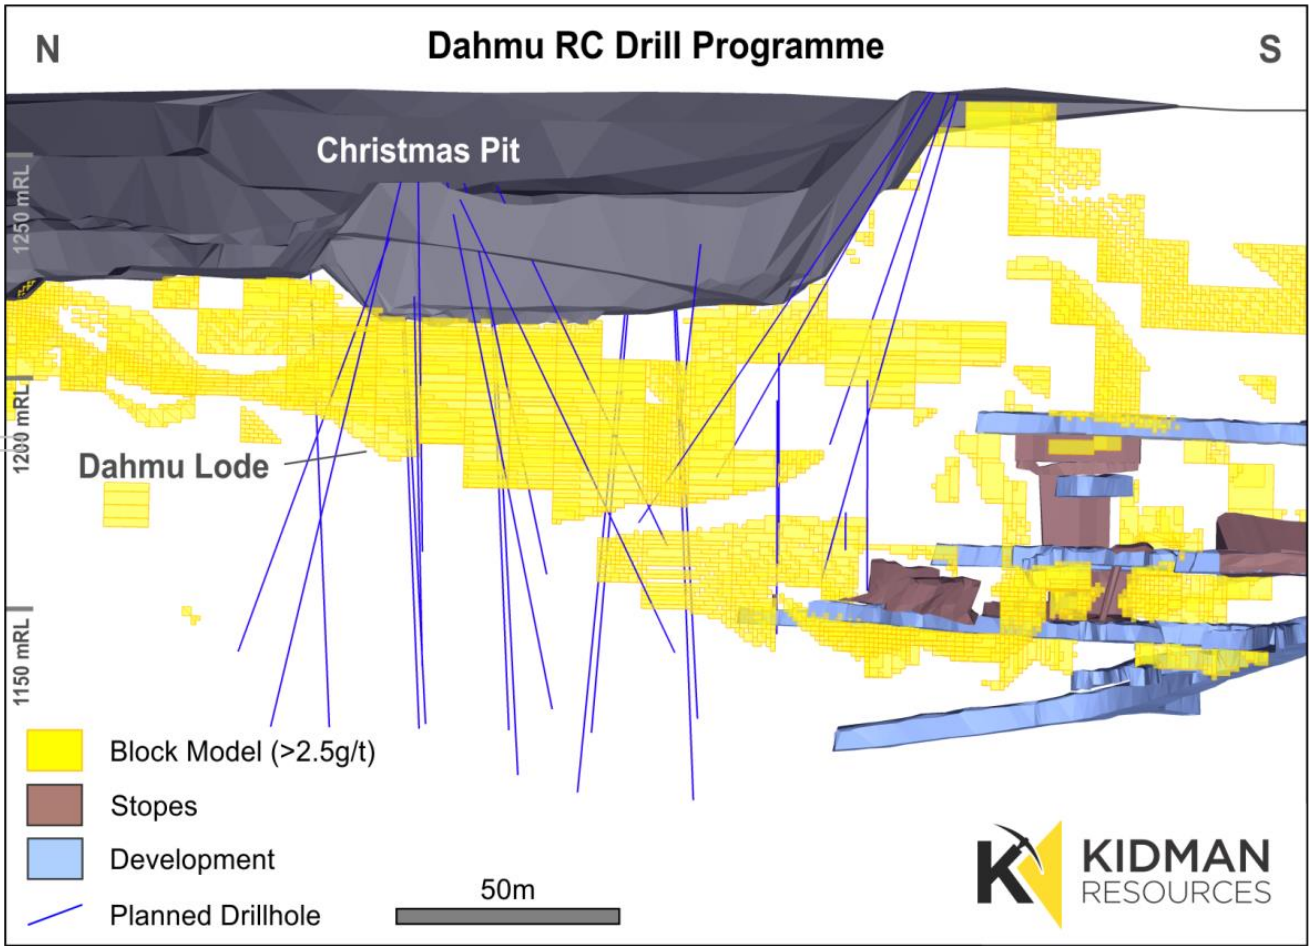


Figure 3: RC Programme underway to define Dhamu lode extensions

For personal use only

For personal use only

Kidman Background

Kidman is a diversified resource company currently establishing the Burbanks Gold Mine near Coolgardie in WA for production to commence in the September quarter of 2015.

Kidman also owns advanced exploration projects in the Northern Territory (Home of Bullion – Cu, Au, Pb, Zn, Ag/ Prospect D - Ni, Cu) and New South Wales.

In New South Wales the company has the Crowl Creek Project which is host to numerous projects such as Murrays (Au) Blind Calf (Cu, Au) and Three Peaks (Cu, Pb, Ag).

The company also owns the Brown's Reef project in the southern part of the Cobar Basin (Zn, Pb, Ag, and Cu)

For further information on the Company's portfolio of projects please refer to the website at: www.kidmanresources.com.au

Martin Donohue (Managing Director)
Email: info@kidmanresources.com.au

Media:
Read Corporate
Paul Armstrong / Nicholas Read
+61 8 9388 1474

Competent Persons Statement

Exploration:

The information in this release that relates to sampling techniques and data, exploration results and geological interpretation has been compiled by Mr. Michael Green BSc (Hons), MAusIMM, an employee of the Company. Mr. Green is a Member of the Australian Institute of Mining and Metallurgy and he has sufficient experience with the style of mineralisation and types of deposits under consideration, and to the activities undertaken, to qualify as a competent person as defined in the 2012 Edition of the "Australian Code for the Reporting of Exploration Results, Mineral Resources and Ore Reserves (The JORC Code) for reporting the exploration results. Mr. Green consents to the inclusion in this report of the contained technical information in the form and context in which it appears.

Resource Estimation:

The information in this release that relates to the Estimation and Reporting of Mineral Resources has been compiled by Mr. Richard Buerger BSc (Hons). Mr. Buerger is a full-time employee of Mining Plus Pty Ltd and has acted as an independent consultant on the Burbanks Deposit Mineral Resource estimation. Mr. Buerger is a Member of the Australasian Institute of Mining and Metallurgy and of the Australian Institute of Geologists and has sufficient experience with the style of mineralisation, deposit type under consideration and to the activities undertaken to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (The JORC Code). Mr. Buerger consents to the inclusion in this report of the contained technical information relating the Mineral Resource Estimation in the form and context in which it appears.

Cautionary Statement

Readers should use caution when reviewing the exploration and historical production results presented and ensure that the Modifying Factors described in the 2012 edition of the JORC Code are considered before making an investment decision.

For personal use only

Summary of Material Information

The information in this report relates to the Burbanks operation of Kidman Resources Limited. A summary of material information used to estimate the Mineral Resources and Ore Reserves, as per the JORC 2012 Reporting Guidelines is as follows. Further information is detailed in the following Table 1's.

Geology and Geological Interpretation

The Coolgardie Goldfield is a constituent of the Yilgarn Craton's Eastern Goldfields, lying on the western margin of the Kalgoorlie Terrane within the ca. 2.7 Ga Norseman-Wiluna Greenstone Belt. An arcuate series of deformed amphibolite facies mafic-ultramafic volcanic and intrusive rocks overlain by felsic volcanic and sedimentary rocks comprise the greenstone belt of the goldfield.

The Au deposits of the Coolgardie Goldfield have classified historically by the alteration assemblage and zonation around the lodes, or the structural and lithological setting of the deposit. The four categories based on structural and lithological relationships advanced by Knight (1993) are: deposits along sheared porphyry-ultramafic contacts, gabbro-hosted quartz vein sets, fault-bound quartz vein sets, and laminated quartz reefs. Of these styles, laminated quartz reefs have produced approximately half of all Au from the goldfield, including the two largest producers, Burbanks, and Bayleys.

The Burbanks gold deposit is hosted by the high-Mg basalt and dolerite of the Burbanks Formation. Alteration and subsequent metamorphic differentiation within the sequence has produced varying mineralogy, texture, and grain size within the mafic precursor, which historically has led to the description of gabbro and garnetiferous diorite as part of the host sequence. Recent work by Dr John Stewart (2015) has divided the sequence into five tectonostratigraphic units:

- Fine-grained amphibolite with a basaltic-doleritic appearance
- Coarse-grained amphibolite with a gabbroic appearance
- Gneissic amphibolite with a schistose to mylonitic texture
- Feldspar-amphibole ± garnet gneiss with a dioritic appearance
- Quartz-veined zones

Two generations of later dykes intrude the sequence; one of quartz-feldspar composition and one of doleritic composition.

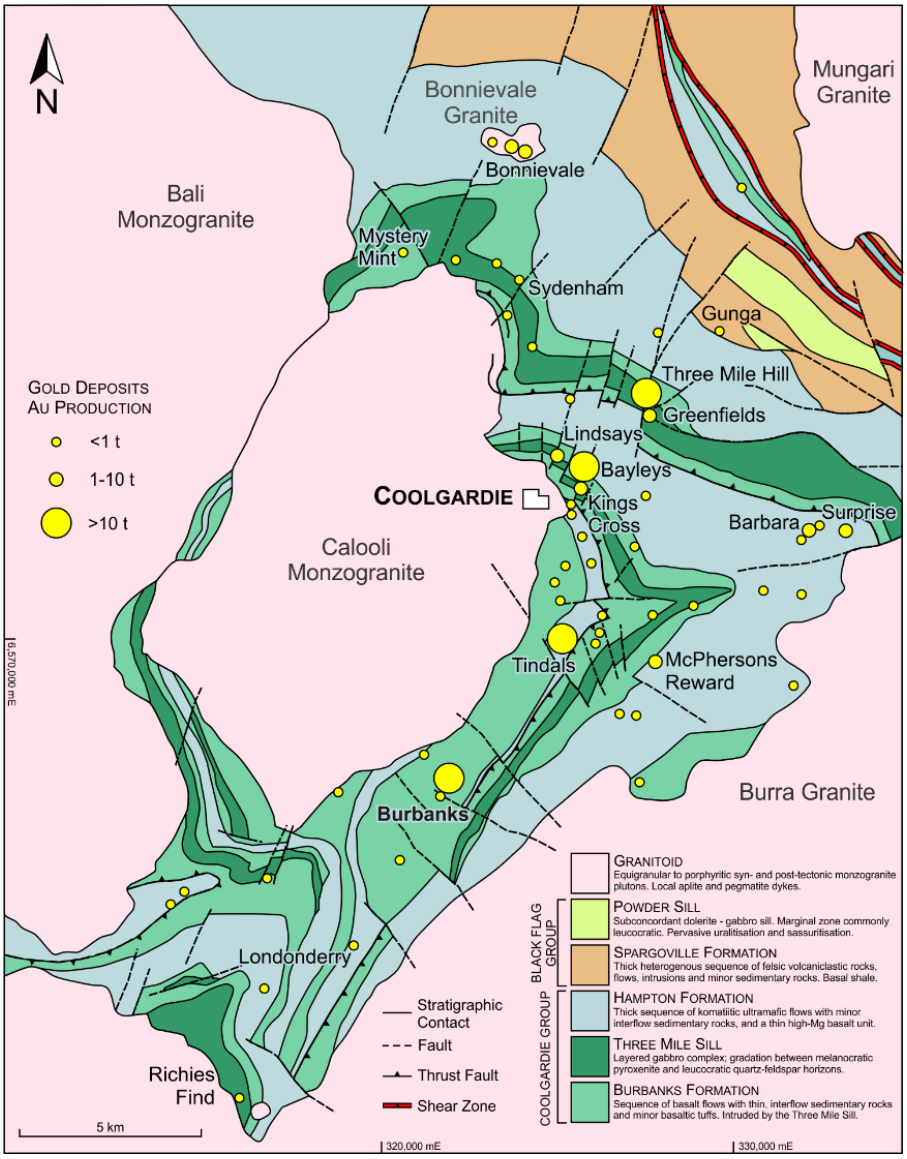


Figure 4: Geology of the Coolgardie Goldfield, redrawn from Knight et al 1993

Drilling Techniques

Both RC and Diamond drilling techniques are used at Burbanks. Most of the drilling completed from Underground locations is LTK60 in size

Sampling and Sub-Sampling Techniques

Core sample intervals are defined by the geologist to honour geological boundaries ranging from 0.3 to 1.5m in length.

RC drill sampling was historically sampled either in one metre intervals or composite sampled by spearing sample bags to form a four or five metre interval. After logging, the geologist marked intervals of interest for subsequent sampling. Sample intervals were nominally 4m, but may have been constrained by logged lithological, mineralisation or alteration boundaries to as small as 1 metre. Kidman, when undertaking RC sampling will sample over one metre intervals due to the narrow nature of the ore bodies within the mineralised system.

Core is aligned and measured by tape, comparing to down-hole core blocks consistent with industry practice. Any discrepancies are immediately highlighted and addressed by the driller and their run sheet.

For personal use only

Diamond drilling has been completed to industry standard using varying sample lengths (0.3 to 1.5m) based on geological intervals, which are then crushed and pulverised to produce a ~200g pulp sub-sample to use in the assay process. Diamond core samples are fire assayed (30g charge or 50g charge). Visible gold is occasionally encountered in core.

Sample Analysis Method

Kidman Resources employees the services of ALS Laboratories in Kalgoorlie for all assaying required in exploration programmes. The procedure utilised includes the following:

- Sort all samples and note any discrepancies to the client submitted paperwork. Record a received weight (WEI-21) for each sample. Separate out any samples for SG analysis onto a separate trolley to ensure they are not crushed.
- Dry samples at 95 degrees until dry.
- Perform non wax dipped SG analysis (OA-GRA08) on requested samples and return these to the drying oven once completed.
- Crush samples to 6mm nominal (CRU-21) split any samples >3.2Kg using riffle splitter (SPL- 21).
- Generate duplicates for nominated samples, assigning D suffix to the sample.
- Pulverise samples in LM5 pulveriser until grind size passes 90% passing 75um (PUL-23). Check grind size on 1:20 using wet screen method (PUL-QC).
- Take ~400g working master pulp for 50g fire assay, AAS finish (Au-AA26)
- Samples are assayed for gold to 0.01ppm. Detection limits are in ppm unless otherwise noted. For pre- Kidman Resources (KDR) samples, best practice is assumed.

Estimation Methodology

Mineral Resource estimation is completed within Maptek's Vulcan V9.1 Resource Modelling software. Three dimensional mineralisation wireframes are completed within Vulcan, using a 0.5 g/t Au cut-off grade for the mineralisation near the surface, with a 1 g/t Au cut-off utilized for the deeper mineralisation. All wireframes were snapped to appropriate assay intervals.

An Inverse Distance weighting interpolation technique is used to estimate the Mineral Resource as it is considered appropriate given the nature of mineralisation and mineralisation configuration.

The Mineral Resource database is uniquely flagged with mineralisation zone codes as defined by wireframe boundaries and then composited into 1m lengths and these are used for estimating the Mineral Resource. The composites are extracted with minimum passing of 70% and best fit such that no residuals are created.

Statistical and geostatistical analysis are undertaken within Snowden's Supervisor™ software.

Histograms, log-probability plots and mean variance plots are considered in determining the existence of extreme values and if present, to select the appropriate cut-offs for each mineralised zone. The points of inflexion in the upper tail of the distribution on the log-probability plots as well as their spatial distributions are examined to help identify extreme values and decide on the treatments applied. These extreme values are either treated with the application of a top-cut or high grade spatial restriction or a combination of both. All grade values greater than the cut-off grade are set to the cut-off value (capped).

Due to the thin nature of the mineralisation, consistent and robust variograms were not able to be obtained for the majority of the lodes, hence an Inverse Distance weighting interpolation technique was used.

For personal use only

For personal use only

Only gold was estimated in the resource model.

Drill hole spacing is in the majority of the Indicated Resource portion of the deposit is approximately 20m (x) x 20m (y) x 10m (z). A block model was created for the Burbanks project area in Vulcan ® Version 9.1 using a parent block size of 10mE by 10mN by 10mRL. The sub-blocking functionality in Vulcan was employed utilizing 1m x 1m x 1m sub-blocks, which were estimated within the parent block. The block size is considered appropriate for the drill-hole spacing.

No assumption has been made regarding selective mining units.

Estimation of gold utilized three interpolation runs with each run increasing the search ellipse size and decreasing the minimum number of samples required for each block to populate with grade:

- The 1st pass utilized a 25m x 10m x 5m search ellipse oriented along the strike and dip of each lode with a minimum of 4 and a maximum of 20 composites used during the interpolation with a maximum of two samples used from each drill-hole.
- The 2nd pass utilized a 50m x 20m x 10m search ellipse oriented along the strike and dip of each lode with a minimum of 2 and a maximum of 20 composites used during the interpolation with a maximum of two samples used from each drill-hole.
- The 3rd and final pass utilized a 200m x 60m x 30m search ellipse oriented along the strike and dip of each lode with a minimum of 1 and a maximum of 20 composites used during the interpolation.

The process of validation includes standard model validation using visual and numerical methods:

- The block model estimates are checked against the input composite/drillhole data with sufficient spot checks completed on sections and plans.
- The block model estimated global means for each mineralised domain are checked against the composite mean grades to ensure they are within acceptable limits.
- Swath plots of the estimated block grades and composite mean grades are generated by easting's, northings and elevations and reviewed to ensure acceptable correlation.

Although mining has occurred at Burbanks in the past both from underground and open pit sources, no reliable production or reconciliation data was able to be sourced to further validate the relative accuracy of the block model.

Cut-off Grade(s)

Multiple cut-off grades are used for the Burbanks deposit. An area between 5400m N and 5700m N, to a depth 1300m RL is reported at a 1 g/t Au cut off. This material is planned to be mined utilizing open pit methods.

All other mineralisation is reported at a cut-off grade of 2.5 g/t Au and is planned to be mined using underground mining extraction methods – the close proximity of the underground development to these lodes has resulted in a slightly lower cut-off being applied to the underground portion of the resource.

The Burbanks Mineral Resource has been reported by cut-off grade and Mineral Resource Category.

Mining and Metallurgical Methods and Parameters

Burbanks undertakes preliminary design analysis to assess prospects for economic extraction for declaration of Mineral Resources using actual and predicted costs from the mining operations and minimum mining widths of 1.5m. Mining methodology is generally by long hole retreat technique.

All material is assumed to be trucked and toll treated at nearby processing facilities. Recovery factors are based on historical toll milling results of ore treated from the Burbanks mine.

Criteria Used for Classification

The Mineral Resources has been classified into Measured, Indicated and Inferred categories following the guidelines of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code 2012). The classification is based on drill hole intercept spacing, geological confidence, grade continuity and estimation quality. A combination of these factors guides the manual digitising of strings on drill sections to construct envelopes that were utilised to control the Mineral Resource categorisation. This process allows review of the geological control/confidence on the deposit.

No part of the Burbanks Mineral Resource has been classified as a Measured Resource.

The Indicated Resource were based on a drill hole spacing of 25 m by 25 m with population of blocks during the first interpolation pass.

The Inferred Resource were based on a drill hole spacing of up to 100 m by 100 m with population of blocks on the second interpolation pass.

Results reflect the Competent Persons' view of the deposit.

Please refer to the Competent Person's statements and the detailed information given in JORC Table 1 of this announcement for more information.

For personal use only

For personal use only

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	• *Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down-hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.* • *Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.* • *Aspects of the determination of mineralisation that are Material to the Public Report.* • *In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information*	This Table relates to historic sampling completed at the Burbanks Project. The Burbanks Project has been sampled using both Reverse Circulation (RC), Auger/Rotary Air Blast (RAB) and surface/Underground diamond drilling (DD). All DD sampled sections reported are NQ2 or LTK60. Core sample intervals are defined by the geologist to honour geological boundaries ranging from 0.3 to 1.5m in length. RC drill sampling was historically sampled either in one metre intervals or composite sampled by spearing sample bags to form a four or five metre interval. After logging, the geologist marked intervals of interest for subsequent sampling. Sample intervals were nominally 4m, but may have been constrained by logged lithological, mineralisation or alteration boundaries to as small as 1 metre. A total of 113 Reverse Circulation drill holes for 5612.00 m have been drilled by KDR to date. Holes were angled to optimally intersect the mineralised zones in consideration of site accessibility. To date analysis of 6097 samples have been received from the 5642 samples collected and submitted for analysis. Core is aligned and measured by tape, comparing to down-hole core blocks consistent with industry practice. Any discrepancies are immediately highlighted and addressed by the driller and their run sheet. Diamond drilling has been completed to industry standard using varying sample lengths (0.3 to 1.5m) based on geological intervals, which are then crushed and pulverised to produce a ~200g pulp sub-sample to use in the assay process. Diamond core samples are fire assayed (30g charge or 50g charge). Visible gold is occasionally encountered in core.
Drilling techniques	• *Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).*	Previous operators carried out surface and underground diamond drilling by using HQ2, HQ3 and PQ2 (triple tube) LTK60 and NQ2 (standard tube) techniques. All core is routinely orientated using the ORI-shot device or similar (Ezy-Ori, Ezy-Mark). Hole depths range from 5m to 444 m. KDR has undertaken a pit drilling programme using Reverse circulation 5.25" diameter holes which were drilled by VM Drilling.
Drill sample recovery	• *Method of recording and assessing core and chip sample recoveries and results assessed.* • *Measures taken to maximise sample recovery and ensure representative nature of the samples.* • *Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.*	RC recoveries are logged and recorded in the database. Overall recoveries are >95% for Burbanks Project. Depths were checked against rod counts which were routinely carried out by the drilling contractor. Recoveries are recorded as a percentage calculated from measured core verses drilled intervals. DD drilling results in high core recovery due to the competent nature of the ground. RC samples were routinely visually checked for recovery, moisture and contamination. There is no known relationship between sample recovery and grade.
Logging	• *Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.* • *Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.* • *The total length and percentage of the relevant intersections logged.*	All information captured by previous explorers is imported into the Kidman database and verified before reporting. Kidman Resources undertakes industry best practice for any exploration programmes it undertakes. Steps taken are detailed below: Information on structure type, dip, dip direction, alpha angle, beta angle, texture, shape, roughness and fill material is stored in the structure table of the database. Photography of core has not been regularly completed by previous companies, this will be a standard practice by Kidman Resources for future programmes. RC samples are logged on a one metre basis. Both the dry sample and washed, sieved chips were logged. A small sample of washed and sieved chips from each metre drilled is stored in labelled plastic chip trays. Diamond core is logged over varying intervals,

For personal use only

		dependent on observed changes for the variable under investigation (e.g. lithology, alteration etc.). The geological logs are carefully compiled with appropriate attention to detail. Kidman Resources utilises Field Marshall as its logging interface, with data recorded on multiple table files, these include geology, alteration, mineralisation, structure, orientation, fracture frequency, veining and recovery. Data is validated on entry using a library of standardised codes. For pre- Kidman Resources (KDR) activities, best practice is assumed.
Sub-sampling techniques and sample preparation	• *If core, whether cut or sawn and whether quarter, half or all core taken.* • *If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.* • *For all sample types, the nature, quality and appropriateness of the sample preparation technique.* • *Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.* • *Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.* • *Whether sample sizes are appropriate to the grain size of the material being sampled.*	Core is half cut with a diamond core saw. Sample intervals were defined by a qualified geologist to honour geological boundaries. All mineralised zones are sampled plus associated barren material in contact with MZs. Kidman Resources employees the services of ALS Kalgoorlie for all assaying required in exploration programmes. The procedure utilised include the following: • Sort all samples and note any discrepancies to the client submitted paperwork. Record a received weight (WEI-21) for each sample. Separate out any samples for SG analysis onto a separate trolley to ensure they are not crushed. • Dry samples at 95 degrees until dry. • Perform non wax dipped SG analysis (OA-GRA08) on requested samples and return these to the drying oven once completed. • Crush samples to 6mm nominal (CRU-21) split any samples >3.2Kg using riffle splitter (SPL- 21). • Generate duplicates for nominated samples, assigning D suffix to the sample. • Pulverise samples in LM5 pulveriser until grind size passes 90% passing 75um (PUL-23). Check grind size on 1:20 using wet screen method (PUL-QC). • Take ~400g working master pulp for 50g fire assay, AAS finish (Au-AA26) • Samples are assayed for gold to 0.01ppm. Detection limits are in ppm unless otherwise noted. For pre-Kidman Resources (KDR) samples, best practice is assumed.
Quality of assay data and laboratory tests	• *The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.* • *For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.* • *Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.*	For all drill core samples being reported, gold concentration is determined by fire assay using the lead collection technique with a 50 gram sample charge weight. An AAS finish is used and considered as total gold digestion. AMALG Resources used the Amdel Lab in Kalgoorlie and used a nominal 50g charge for FA. No geophysical results reported The QAQC protocols used include the following for all drill samples: • The field QAQC protocols used include the following for all drill samples: - Commercially prepared certified reference materials (CRM) are inserted at an incidence of 1 in 20 samples. The CRM used cannot be identified by the laboratory, - QAQC data is assessed when received from the lab and following import by an external database administrator. • The laboratory QAQC protocols used include the following for all drill samples: - Repeat analysis of pulp samples occurs at an incidence of 1 in 20 samples, - The laboratory reports its own QAQC data on with each batch returned • Failed standards are generally followed up by re-assaying a second 50g pulp sample of all samples in the fire above 0.1ppm by the same method at the primary laboratory. Both the accuracy component (CRM's checks) and the precision component (duplicates and repeats) of the QAQC protocols are thought to demonstrate acceptable levels of accuracy and precision

For personal use only

Verification of sampling and assaying	• *The verification of significant intersections by either independent or alternative company personnel.* • *The use of twinned holes.* • *Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.* • *Discuss any adjustment to assay data.*	To date KDR has not twinned any drill holes. Primary data was collected using a set of standard logging templates on laptop computers using lookup codes. Once data collection is complete the information was sent to Geobase Australia for additional validation and compilation prior to loading into the company's into an Azeva Database Management System. KDR undertakes continual data integrity checks and validation. No adjustments or calibrations were made to any assay data. Holes drilled to date by KDR have been located with a Total Station and are assumed to be accurate to ± 0.1 m. This is considered appropriate for the current drill hole spacing. Single Shot Downhole surveys were completed as deemed appropriate.
Location of data points	*Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control.*	All horizontal coordinates are based on the Burbank Mine Grid and converted to GDA94_51S grid system. Drillhole collar locations have been surveyed using Total Station method/s by Minecomp personnel. These accuracy of the surveying ranges between 0.1 and 0.1 m All maps and plans are presented in in MGA 94 Zone 51 or in Burbanks Mine Local Grid which is oriented 43 degrees magnetic-sub parallel to the strike of the major lithological units and structural features of the Burbanks area
Data spacing and distribution	• *Data spacing for reporting of Exploration Results.* • *Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.* • *Whether sample compositing has been applied.*	Historical pit drilling has predominantly been drilled on a 10m x 20m spacing, Underground exploration and definition drilling has been drilled on a range of spacing, from 10m to 50m The mineralisation at Burbank's has demonstrated sufficient continuity in geological observations, but due to the high nugget effect of the ore body sludge drilling is often used to further delineate ore zones. Sludge holes are not reported as they do not meet adequate QAQC standards; they are however used as an operational control. Diamond and RC samples are measured as 1 metre intervals or cut to match geological boundaries.
Orientation of data in relation to geological structure	• *Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.* • *If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.*	M15/161 lies axially along the Burbanks shear over a distance of ~6km. The shear trends northeast and dips steeply northwest. It is 60-100m wide within a package of basalts with intercalated gabbro/dolerite and sediments. The mineralised lodes form sub-parallel to the Burbanks Shear.
Sample security	• *The measures taken to ensure sample security.*	Sample chain of custody is managed by Kidman. Samples for the Project are stored on site and delivered to the laboratory in Kalgoorlie by Kidman Resources personnel. Whilst in storage the samples are kept in a locked yard that is monitored by CCTV. Tracking sheets tracks the progress of batches of samples.
Audits or reviews	• *The results of any audits or reviews of sampling techniques and data*	A further internal review of the sampling techniques and data is being conducted by Kidman Resources as part of due diligence and continual review of protocols, this occurs as a matter of course for all exploration activities undertaken by Kidman Resources. Pre-KDR data audits were found to be minimal in regards to QAQC, though in line with industry standards of the time.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	• *Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.* • *The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to*	The drilling was undertaken on tenement ML15/161 and forms part of the company's Coolgardie project located in Western Australia. All tenements are in good standing. There are no heritage issues within the current exploration package. All leases and licences to operate are granted and in the order of 2 to 15 years. M15/0161 Barra Resources Caveat $25/OZ M15/0026 SV 132.80H Royalty 2%, M15/0518 M15/0637, M15/1272 SV9.3H Philip Scott Milling

	operate in the area.	Caveat, M15/1361, P15/4848, P15/4849, P15/4851, P15/4852, P15/5234, P15/5235 The Burbanks and Gunga projects consist of 1184Ha.
Exploration done by other parties	• *Acknowledgment and appraisal of exploration by other parties.*	Previous Explorers in the tenement and Project area include Unknown, WMC, Jarrafire, Pettingill, Barra, Callion, Normandy, AMALG, Barra Resources, Perseverance, Jones Mining, Blue Tiger. In total including KDR exploration there has been o 1812 Drillholes holes for 118,481.19 m o 389 Grade Control Drilling and Face Samples taken for 4907.90 m 1885-1914 The Birthday Gift mine was established following the discovery of Gold at Burbanks in 1885, the greatest period of production occurred from 1897-1903. Work then ceased at the project with the commencement of the First World War. 1946-1951 New Coolgardie Mines acquired and consolidated the operations at Burbanks. Management of the project was then assumed by Western Mining from 1948-1951. From the early 1950s to 1978 the old mine workings at Burbanks were covered by some 20GMLs. In 1978 Jones Mining NL acquired all 20 GMLs and pegged two prospecting licences to the north. In 1985 these tenements were amalgamated into a single mining lease M15/161. 1985-1991, in 1986 Jones Mining reached a joint agreement with Callion Mining Pty Ltd, a partnership with Metallgesellschaft of Australia Pty Ltd and Lubbock Nominees, whom conducted several phases of shallow RAB exploration. 1991-1999 Amalg Resources purchased the Burbanks mining lease from Metallgesellschaft in 1991, Amalg then proceeded to establish the Christmas Open pit. Amalg Resources then sold ML15/161 to Barra Resources whom commenced a drill programme to target the 7 level mineralisation mined by WMC and to extend the mineralised lodes within the Christmas and Lady Robinson Pits. The Burbanks Project then became fully acquired by Blue Tiger Mines (a private entity) in 2013. All previous work is accepted and assumed to be industry standard at that time
Geology	• *Deposit type, geological setting and style of mineralisation.*	The Burbanks Project is located within the southern extents of the northeast – southwest trending, reverse - dextral Burbanks Shear Zone. The stratigraphy is characterised by a sequence of steeply west-dipping to sub-vertical, fine grained high MgO basalts (typically pillowed) grading to fine-medium grained and massive-ophitic dolerites. This sequence trends northeast – southwest, largely parallel with the Burbanks Shear Zone. Intruding this sequence are a series of fine to medium grained, garnetiferous diorite bodies. The dioritic intrusives are commonly sub-vertical, 2 – 50m thick, and sub-parallel to the surrounding mafic sequence, exhibiting strike lengths from 20-250+m. Mafic – diorite contacts are not always sharp, owing to the later reheating and partial assimilating with the mafic host sequence. Earlier structural observations (Knight et al, 1993) have identified that ore zones at Burbanks are characterised by NE striking, laminated and highly boudinaged, steeply dipping quartz - carbonate lodes. Recent mining activity from July 2006 to present confirms the nature of these mineralised systems while also emphasising the importance of both mafic and intermediate (diorite) rocks as hosts to mineralisation **Mineralisation** Three main styles of mineralisation have been observed at Burbanks, each related to a specific host rock sequence. The Jesson and Hadfield lodes provided the greatest contribution to historical tonnes and ounces at Burbanks. Both lodes lie on the western edge of the known mineralised system at Burbanks, hosted within a sequence of moderately foliated pillow basalt grading to fine grained dolerite. Mineralisation commonly occurs as thin, sub vertical to steeply east dipping highly boudinaged, attenuated and ptygmatic, anastomosing

For personal use only

For personal use only

		quartz – carbonate veins, surrounded by a moderate to strong biotite – amphibole – chlorite – carbonate alteration assemblage with lesser (1 – 5% pyrrhotite). The recently discovered Dahmu lode (located on the far eastern edge of known mineralisation) bears some similarities with Jesson and Hadfield. The second style, of which the Tailor system is an example, is hosted mostly within fine to medium grained dolerite, and displays more brittle textures. Quartz veining is more frequent with both laminated and breccia textures noted. Both larger scale open folds and tighter, superimposed ptygmatic folds are also observed throughout. An alteration assemblage of biotite – silica – amphibole - chlorite – carbonate is commonly noted, with 5 – 15% pyrite and pyrrhotite present within high-grade zones. The Wahloo and Eastern lodes represent the third major ore style at Burbanks. These systems are hosted almost exclusively within fine to medium grained, garnetiferous diorite. Unlike the previous styles, veining within Wahloo and Eastern is represented by highly irregular, often chaotic quartz – carbonate stringers and as such, were poorly understood when mined historically. Alteration accompanying quartz veining is characterised by silica – sericite – carbonate, with 5 – 20% fine disseminated pyrite and pyrrhotite within high-grade intervals. Development and spatial setting of ore systems at Burbanks have been influenced by several factors; most notably stratigraphy and competency contrast. As highlighted in the previous section, Wahloo and Eastern ore zones are focused almost exclusively within diorite. Highest grading ore typically focuses along both the eastern and western diorite contacts. During deformation, diorite (owing to its high silica content) acts in a more brittle manner than the surrounding mafic sequence, allowing auriferous fluids to preferentially focus into these host units. Jesson and Tailor style mineralisation exhibit a more ductile texture due primarily to being hosted within mafic sequences. Orientation of these lodes are subsequently sub-parallel to the regional Burbanks Shear Zone and exhibit a boudinaged, poddy and discontinuous style in keeping with their more ductile setting.
Drill hole Information	• *A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:* *o easting and northing of the drill hole collar* *o elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar* *o dip and azimuth of the hole* *o down hole length and interception depth* *o hole length.* • *If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.*	See previous announcements by KDR for a table of Significant historical intercepts.
Data aggregation methods	• *In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.* • *Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.* • *The assumptions used for any reporting of metal equivalent values should be clearly stated.*	High grade intervals internal to broader zones of mineralisation are reported as included or within intervals. Maximum internal dilution is 2m within a reported interval. No grade top cut off has been applied. No metal equivalent is used or applied. A minimum cut-off grade 0f 0.1g/t Au is applied to the reported gold intervals
Relationship between mineralisation	• *These relationships are particularly important in the reporting of Exploration Results.*	M15/161 lies axially along the Burbanks shear over a distance of ~6km. The shear trends northeast and dips steeply northwest. It is 60-100m wide within a package

widths and intercept lengths	• *If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.* • *If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').*	of basalts with intercalated gabbro/dolerite and sediments. The mineralised lodes form sub-parallel to the Burbanks Shear. Underground drilling is predominantly perpendicular to the lodes, as the thickness of most lodes has been established from face and backs mapping underground true widths of drill intercepts are easily calculated.
Diagrams	• *Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.*	Refer to Figures in body of text.
Balanced reporting	• *Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.*	Representative results have previously been reported in Announcements by KDR
Other substantive exploration data	• *Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.*	Multi element assaying has historically been conducted routinely on samples for a suite of potentially deleterious elements. Forthcoming work will include this type of analysis. The results shown are from historic work completed before the acquisition by Kidman Resources
Further Work	• *The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).*	KDR is currently undertaking an RC programme to delineate the Dhamu Lode south of the Christmas Pit. An Underground Diamond drilling programme is also planned to commence in September which will look to further define lodes accessible in the Birthday Gift Underground Operation. Face sampling and back mapping is routinely undertaken during Underground production activities.

SECTION 3 ESTIMATION AND REPORTING OF MINERAL RESOURCES

(CRITERIA LISTED IN SECTION 1, AND WHERE RELEVANT IN SECTION 2, ALSO APPLY TO THIS SECTION.)

Criteria	***JORC Code Explanation***	**Commentary**
Database integrity	• *Measures taken to ensure that data has not been corrupted by, for example, transcription or keying errors, between its initial collection and its use for Mineral Resource estimation purposes.* • *Data validation procedures used.*	A complete drilling database was supplied by Kidman in the form of csv files extracted from an access database. The database is managed by a third party administrator. Mining Plus completed a review of all files for syntax, duplicate values, from and to depth errors and EOH collar depths. The assays received for the recent drilling undertaken by Kidman were verified for consistency with the values in the data base by the Competent Person during the site visit. Once loaded into 3D software, Mining Plus completed a review of all survey data by visually validating all hole traces for consistency.
Site visits	• *Comment on any site visits undertaken by the Competent Person and the outcome of those visits.* • *If no site visits have been undertaken indicate why this is the case.*	The Mining Plus Competent Person completed a site visit to the Burbanks deposit in August 2015. The visit entailed a review of site operations, practices and procedures, plus a visit to the surface and underground workings to validate the mineralisation geometry, style and controls. While on site the CP reviewed the drilling and data management protocols, density determination methods, mine geology procedures, ore reconciliation and diamond drilling and sampling.

For personal use only

For personal use only

Geological interpretation	• *Confidence in (or conversely, the uncertainty of) the geological interpretation of the mineral deposit.* • *Nature of the data used and of any assumptions made.* • *The effect, if any, of alternative interpretations on Mineral Resource estimation.* • *The use of geology in guiding and controlling Mineral Resource estimation.* • *The factors affecting continuity both of grade and geology.*	The geological information is built out of 1,813 drill-holes within the Burbanks deposit. Supergene mineralisation was interpreted using drill-hole logs, depth of weathering in the exposed pit walls and the mineralisation continuity. The data used in the geologic model is a combination of diamond core, underground mapping and sampling and RC drilling. Additional production drilling and blast hole data included in the dataset was used to constrain the mineralisation interpretation but was not used in the resource estimation. Detailed structural and lithological polygons were supplied by Kidman to Mining Plus, which were utilized when creating the geological wireframes in Leapfrog and/or Vulcan software. The geological interpretation was built around grouping similar rock types (of similar bulk density) to enable the model to be coded with a specific density estimate to produce reasonable estimates of tonnage. The completion of additional diamond drilling from underground locations would result in a more robust geological model as the information gained from diamond drill core is of greater detail than that obtained from RC chips. This should result in a more refined model and a more robust estimate. In general, the majority of mineralization is hosted adjacent to intrusive contacts and along structural planes. Areas of intense structural displacement, whether folded of faulted, provide the highest grades and thickest mineralisation in the model. The main mineralized lodes are continuous over almost the entire deposit, although the grade and thickness shows a high degree of variability in areas of limited structural disruption. The greatest continuity in grade and thickness occurs in zones of structural complexity, either in fold hinge zones or associated with syn to late fault zones.
Dimensions	• *The extent and variability of the Mineral Resource expressed as length (along strike or otherwise), plan width, and depth below surface to the upper and lower limits of the Mineral Resource.*	The 2015 Burbanks Mineral Resource Estimate extends 1,350m along strike in the north/south direction by 350m across strike in the east/west direction. The mineralisation is generally steeply dipping and extends to a maximum depth of 400m below surface.
Estimation and modelling techniques	• *The nature and appropriateness of the estimation technique(s) applied and key assumptions, including treatment of extreme grade values, domaining, interpolation parameters and maximum distance of extrapolation from data points. If a computer assisted estimation method was chosen include a description of computer software and parameters used.* • *The availability of check estimates, previous estimates and/or mine production records and whether the Mineral Resource estimate takes appropriate account of such data.* • *The assumptions made regarding*	Mineral Resource estimation is completed within Maptek Vulcan V9.1 Resource Modelling software. Three dimensional mineralisation wireframes are completed within Vulcan, using a 0.5 g/t Au cut-off grade for the mineralisation near the surface, with a 1 g/t Au cut-off utilized for the deeper mineralisation. All wireframes were snapped to appropriate assay intervals. An Inverse Distance weighting interpolation technique is used to estimate the Mineral Resource as it is considered appropriate given the nature of mineralisation and mineralisation configuration. The Mineral Resource database is uniquely flagged with mineralisation zone codes as defined by wireframe boundaries and then composited into 1m lengths and these are used for estimating the

For personal use only

	recovery of by-products. • *Estimation of deleterious elements or other non-grade variables of economic significance (e.g. sulphur for acid mine drainage characterisation).* • *In the case of block model interpolation, the block size in relation to the average sample spacing and the search employed.* • *Any assumptions behind modelling of selective mining units.* • *Any assumptions about correlation between variables.* • *Description of how the geological interpretation was used to control the resource estimates.* • *Discussion of basis for using or not using grade cutting or capping.* • *The process of validation, the checking process used, the comparison of model data to drill hole data, and use of reconciliation data if available.*	Mineral Resource. The composites are extracted with minimum passing of 70% and best fit such that no residuals are created. Statistical and geostatistical analysis are undertaken within Snowden's Supervisor™ software. Histograms, log-probability plots and mean variance plots are considered in determining the existence of extreme values and if present, the appropriate cut-offs for each mineralised zone. The points of inflexion in the upper tail of the distribution on the log-probability plots as well as their spatial distributions are examined to help identify extreme values and decide on the treatments applied. These extreme values are either treated with the application of a top-cut or high grade spatial restriction or a combination of both. All grade values greater than the cut-off grade are set to the cut-off value (capped). Due to the thin nature of the mineralisation, consistent and robust variograms were not able to be obtained for the majority of the lodes, hence an Inverse Distance weighting interpolation technique was used. Only gold was estimated in the resource model. Drill hole spacing is in the majority of the Indicated Resource portion of the deposit is approximately 20m (x) x 20m (y) x 10m (z). A block model was created for the Burbanks project area in Vulcan ® Version 9.1 using a parent block size of 10mE by 10mN by 10mRL. The sub-blocking functionality in Vulcan was employed utilizing 1m x 1m x 1m sub-blocks, which were estimated within the parent block. The block size is considered appropriate for the drill-hole spacing. No assumption has been made regarding selective mining units. Estimation of gold utilized three interpolation runs with each run increasing the search ellipse size and decreasing the minimum number of samples required for each block to populate with grade: The 1st pass utilized a 25m x 10m x 5m search ellipse oriented along the strike and dip of each lode with a minimum of 4 and a maximum of 20 composites used during the interpolation with a maximum of two samples used from each drill-hole. The 2nd pass utilized a 50m x 20m x 10m search ellipse oriented along the strike and dip of each lode with a minimum of 2 and a maximum of 20 composites used during the interpolation with a maximum of two samples used from each drill-hole. The 3rd and final pass utilized a 200m x 60m x 30m search ellipse oriented along the strike and dip of each lode with a minimum of 1 and a maximum of 20 composites used during the interpolation. The process of validation includes standard model validation using visual and numerical methods: The block model estimates are checked against the input composite/drillhole data with sufficient spot checks completed on sections and plans.

		The block model estimated global means for each mineralised domain are checked against the composite mean grades to ensure they are within acceptable limits. Swath plots of the estimated block grades and composite mean grades are generated by easting's, northings and elevations and reviewed to ensure acceptable correlation. Although mining has occurred at Burbanks in the past both from underground and open pit sources, no reliable production or reconciliation data was able to be sourced to further validate the relative accuracy of the block model.
Moisture	• *Whether the tonnages are estimated on a dry basis or with natural moisture, and the method of determination of the moisture content.*	Tonnages are estimated on a dry basis
Cut-off parameters	• *The basis of the adopted cut-off grade(s) or quality parameters applied.*	Multiple cut-off grades are used for the Burbanks deposit. An area between 5400m N and 5700m N, to a depth 1300m RL is reported at a 1 g/t Au cut off. This material is planned to be mined utilizing open pit methods. All other mineralisation is reported at a cut-off grade of 2.5 g/t Au and is planned to be mined using underground mining extraction methods – the close proximity of the underground development to these lodes has resulted in a slightly lower cut-off being applied to the underground portion of the resource. The Burbanks Mineral Resource has been reported by cut-off grade and Mineral Resource Category.
Mining factors or assumptions	• *Assumptions made regarding possible mining methods, minimum mining dimensions and internal (or, if applicable, external) mining dilution. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential mining methods, but the assumptions made regarding mining methods and parameters when estimating Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the mining assumptions made.*	All material inside the area bound 5400m N and 5700m N, to a depth 1300m RL is planned to be mined utilizing open pit methods. Selective mining methods are planned for this section of the deposit. The remainder of the mineralisation is planned on being mined by underground methods, utilizing a combination of mining methods dependent on mineralisation geometry, grade and thickness.
Metallurgical factors or assumptions	• *The basis for assumptions or predictions regarding metallurgical amenability. It is always necessary as part of the process of determining reasonable prospects for eventual economic extraction to consider potential metallurgical methods, but the assumptions regarding metallurgical treatment processes and parameters made when reporting Mineral Resources may not always be rigorous. Where this is the case, this should be reported with an explanation of the basis of the metallurgical assumptions made.*	Previous toll treatment through a number of third part processing plants by the previous owner have indicated no issues with metallurgical recoveries in the CIL/CIP plant similar to the Ramelius owned mill that will be used to process the ore.
Environmental factors or assumptions	• *Assumptions made regarding possible waste and process residue disposal options. It is always necessary as part of the process of determining reasonable prospects for eventual economic*	The Burbanks project is constructed with a fully lined Tailings Storage Facility and the low degree of sulphidation within the mineralized and un-mineralised rocks indicates no issues with PAF material.

For personal use only

For personal use only

	extraction to consider the potential environmental impacts of the mining and processing operation. While at this stage the determination of potential environmental impacts, particularly for a greenfields project, may not always be well advanced, the status of early consideration of these potential environmental impacts should be reported. Where these aspects have not been considered this should be reported with an explanation of the environmental assumptions made.	
Bulk density	• *Whether assumed or determined. If assumed, the basis for the assumptions. If determined, the method used, whether wet or dry, the frequency of the measurements, the nature, size and representativeness of the samples.* • *The bulk density for bulk material must have been measured by methods that adequately account for void spaces (vugs, porosity, etc.), moisture and differences between rock and alteration zones within the deposit.* • *Discuss assumptions for bulk density estimates used in the evaluation process of the different materials.*	Bulk density determinations are made on selected diamond drill samples using the wax coated water displacement method by site geologists. Tonnages are estimated on a dry basis. A total of 1,667 bulk density measurements; Density values were assigned to the block model by rock type. Mineralisation is assigned a value in keeping with quartz vein hosted material. A factor was not applied to account for void spaces or moisture differences. Density values were incorporated into the Mineral Resource model. Density data are considered appropriate for use in Mineral Resource and Ore Reserve estimation.
Classification	• *The basis for the classification of the Mineral Resources into varying confidence categories.* • *Whether appropriate account has been taken of all relevant factors (ie relative confidence in tonnage/grade estimations, reliability of input data, confidence in continuity of geology and metal values, quality, quantity and distribution of the data).* • *Whether the result appropriately reflects the Competent Person's view of the deposit.*	The Mineral Resources has been classified into Measured, Indicated and Inferred categories following the guidelines of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code 2012). The classification is based on drill hole intercept spacing, geological confidence, grade continuity and estimation quality. A combination of these factors guides the manual digitising of strings on drill sections to construct envelopes that were are to control the Mineral Resource categorisation. This process allows review of the geological control/confidence on the deposit. No part of the Burbanks Mineral Resource has been classified as a Measured Resource. Indicated Resource were based on a drill hole spacing of 25 m by 25 m was required and population of blocks during the first interpolation pass. Inferred Resources were based on a drill hole spacing of up to 100 m by 100 m with population of blocks on the second interpolation pass. Results reflect the Competent Persons' view of the deposit
Audits or reviews	• *The results of any audits or reviews of Mineral Resource estimates.*	No other independent audits or reviews have been undertaken on the Mineral Resource estimate.
Discussion of relative accuracy/ confidence	• *Where appropriate a statement of the relative accuracy and confidence level in the Mineral Resource estimate using an approach or procedure deemed appropriate by the Competent Person. For example, the application of statistical or geostatistical procedures to quantify the relative accuracy of the resource within stated confidence limits, or, if such an approach is not deemed*	The Mineral Resources has been reported in accordance with the guidelines of the 2012 edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves and reflects the relative accuracy of the Mineral Resources estimates.

	appropriate, a qualitative discussion of the factors that could affect the relative accuracy and confidence of the estimate. • *The statement should specify whether it relates to global or local estimates, and, if local, state the relevant tonnages, which should be relevant to technical and economic evaluation. Documentation should include assumptions made and the procedures used.* • *These statements of relative accuracy and confidence of the estimate should be compared with production data, where available.*	

For personal use only